


escape™150

POWER PACK

Get to Know Your Gear

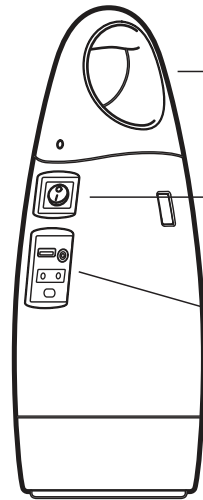

CARRY IT

The handle on top of the ESCAPE 150 makes it easy to carry.

CHARGE IT

The ESCAPE 150 can be powered completely from solar power. Recommended for usage with the BOULDER 15 or larger solar panels.

PLUG IT


The ESCAPE 150 is capable of charging devices through a USB or AC outlet.

Getting Started

1. Be sure to ACTIVATE YOUR WARRANTY at www.GOALZERO.com/warranty
2. Charge your ESCAPE 150 through the input port.
3. Recharge from GOAL ZERO NOMAD 13.5, NOMAD 27, or USB power source.

How to Use Your Gear

- 1 **USB output port**
Accepts any standard USB cable for charging USB devices.
- 2 **AC output port**
Use any AC 220V device up to 80 watts.
- 3 **Car adapter and 12V output port**
Connect the car adapter (included) to charge 12V devices or plug GOAL ZERO lights directly into it.
- 4 **Europlug extension cord**
In order to not block other ports use Europlug extension cord. For more plug options, attach universal plug adapter.

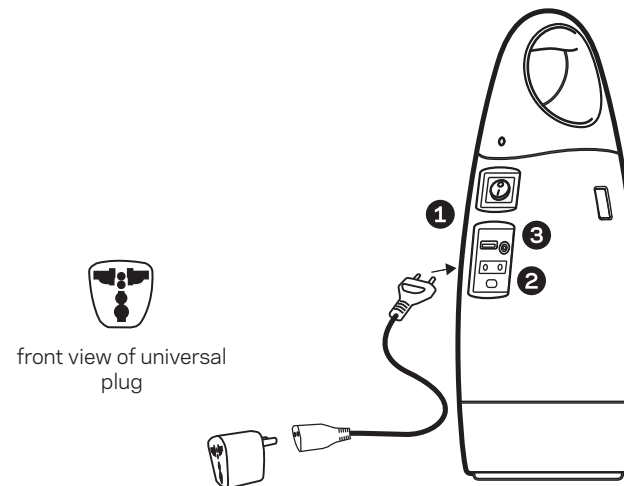

Comes With

- 12V car adapter
- AC wall adapter

Technical Specs

| Usage | |
|------------------------------------|--|
| Charges from the following: | Approx. charge time: |
| AC wall charger | 5 hours |
| 12V car adapter | 5-6 hours |
| BOULDER 30 | 5-10 hours |
| BOULDER 15 | 10-20 hours |
| NOMAD 13.5 | 12-24 hours |
| NOMAD 27 | 6-12 hours |
| ESCAPE 30 | 5-10 hours |
| Inputs | |
| Charging port (4.7mm) | 15-16V, 3A max (45W) |
| Outputs | |
| AC Europlug port* | 80W, modified-sine wave 220VAC, 50Hz |
| USB port | 5V, 1.0A (5W), buck regulated |
| 12V port (6.0mm) | 11-14V, 10A max (120W) |
| Internal | |
| Battery type | Lead-acid (AGM) |
| Battery capacity | 150Wh (12V, 14Ah) |
| Battery voltage range | 11-14.4V |
| Life-span | hundreds of cycles |
| Fuses | Output: 20A, standard car fuse Input: 5A, standard car fuse USB: 1A, standard car fuse |
| General | |
| Weight | 3.7 lbs (1.7 kg) |
| Dimensions | 5.5x5.5x15.5 in (14x14x39 cm) |
| Warranty | 12 months |
| Tested and Certified | FCC and CE |
| Operating usage temp. | 32-104°F (0°-40°C) |
| Optimal storage temp. | 70°F (21°C) |

*ESCAPE 150 comes preconfigured as either 220VAC or 110VAC.

Frequently Asked Questions

How do I know I have a full charge?

The battery indicator on the LED display shows how much charge is left in the battery. If the battery is completely shaded then it is full.

Is it weatherproof?

The ESCAPE 150 will hold up in inclement weather, but it is not waterproof. Make sure the ports are dry before using the device again.

How long can the battery last without being recharged?

To keep the battery healthy, recharge it every 3 months.

Can ESCAPE 150 power packs be chained together?

The ESCAPE 150 is a stand-alone product and cannot be chained to other ESCAPE 150s.

What kind of battery is the ESCAPE 150?

It is a sealed lead acid battery, also known as an AGM.

Compatible With

A variety of USB and AC devices, like:

Laptops
Cell phones
Smart phones
GPS units
MP3 players
Tablets (through AC)

GOAL ZERO products:

GUIDE 10 PLUS battery pack
ROCK OUT speaker
BOLT flashlight
BLAZE headlamp

USER GUIDE
POWER PACK
ESCAPE™ 150

- Fill out your warranty
- Watch demo video
- Download this manual



CONTACT US:

Toll Free: 888.794.6250
14864 Pony Express Road
Bluffdale, UT, 84065

WWW.GOALZERO.COM

We proudly support Tifie Humanitarian
WWW.TIFIE.ORG