


Technical Specifications	
Charging:	Approximate Charge Times
Goal Zero Switch 8	5-10 hours
Goal Zero Guide 10 Plus	6-12 hours
USB devices (cell phone, MP3 player)	2-5 hours
Not compatible with Smart Phones or larger USB devices	
Inputs	
Rated Wattage	3.5 W
Cell type	mono-crystalline
Open-circuit voltage	6.5-7V
Converting eff.	17-18%
Cell area	0.0199 m ²
Outputs	
USB output	5V, 0.5A max (2.5W), linear regulated
Solar port (for Guide 10)	6-6.5V, 0.5A max (3.0W), not regulated

General	
Weight	0.5 lbs (0.22 kg)
Dimensions	6.5 x 1 x 5.5 in (16.5 x 2.5 x 14 cm)
Warranty	12 months
Tested and Certified	FCC
Operating usage temperature	0-120F (-17-48C)

Power Ports on Back of Solar Panel



Guide 10 Plus **OUTPUT**
Charges the Guide 10 Plus, faster than USB.

USB **OUTPUT**
Accepts standard USB cable for charging USB devices. (Including Switch 8)


NOMAD 3.5

PORTABLE SOLAR PANEL

User Guide




- Register your product
- Watch demo video
- Download user manual

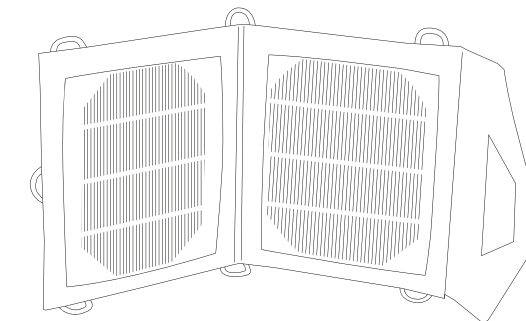

Contact Us:
Toll Free: 888-794-6250
675 West 14600 South
Bluffdale, UT 84065
www.GOALZERO.com

We proudly support Tifie Humanitarian
www.tifie.org

Know Your Gear




CHARGE

From the sun.


1

POWER

Plug in any USB or 12V device.

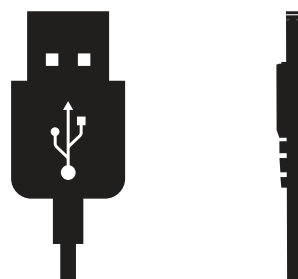

2



REPLENISH

To stay prepared
keep devices plugged into USB
or solar panel.

3

Frequently Asked Questions

Q: Does the solar panel hold a charge?

A: No, the panel produces power only when it is exposed to sunlight. To generate the most power, angle the panel towards the sun. This improves your ability to collect power from the sun. Note: Clouds and windows affect collection efficiency. If you would like to store solar power, combine the Nomad 3.5 with the Switch 8 or Guide 10 Plus.

Q: What can I charge directly from the solar panel?

A: You can charge different USB devices. The Nomad 3.5 will not charge smart phones by itself. We recommend pairing it with the Switch 8 or Guide 10 Plus as an intermediary.

Q: Is the solar panel waterproof?

A: It is weather-resistant and will not be harmed if exposed to rain or snow.

Q: Why can't I charge my smart phone or tablet?

A: Smart phones and tablets draw more current than can be provided. For these devices we suggest using the Switch 8 or Guide 10 Plus with the Nomad 3.5.