

## Get to Know Your Gear



### SECURE IT

The SHERPA UI rests on top of the SHERPA power pack and plugs into the back.

### POWER IT

Make sure to flip the power switch to on before use.

### USE IT



Allows you to use AC plugs at 110-220V and 100 Watts.

## Getting Started

1. Be sure to ACTIVATE YOUR WARRANTY at [www.GOALZERO.com/warranty](http://www.GOALZERO.com/warranty)
2. Attach the SHERPA UI power cord to the chaining port of the SHERPA power pack.
3. Turn the SHERPA power pack on.
4. Turn the SHERPA UI to on.
5. Ensure it is on the right voltage setting and plug in your device.

## How to Use Your Gear

- 1 **Power switch**  
Push the rocker switch to the ON position to use the SHERPA UI with 2 or 3 pronged devices.
- 2 **Plug**  
The universal outlet accepts all common Western, European, and Asian plug types.
- 3 **Voltage**  
A green light indicates which voltage (110 or 220) is selected. To change the voltage flick the switch found on the back of the SHERPA UI under the rubber stopper.
- 4 **Chain**  
The SHERPA UI is NOT a battery. It is meant for use with the GOAL ZERO power packs. Plug it into the chaining cable that comes with the Sherpa power pack in order to use it.
- 5 **Cooling**  
There's no need to worry about your SHERPA UI over-heating. It comes with a built-in fan to keep it cool.

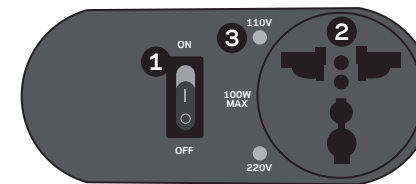

## Technical Specs

### Usage

Use with the following:  
SHERPA 50 or SHERPA 120

### Input

12V port

Chaining port  
11-14V, 10A max (120W)

### Output

AC multi-standard outlet

110/220VAC, user switchable  
100W max

### General

Weight

.8 lbs (0.36 kg)

Dimensions

6x4x2 in (15.2x10x5 cm)

Warranty

12 months

Operating usage temp.

32-104°F (0°-40°C)

## Comes With:

SHERPA UI  
12V male car adapter

## Frequently Asked Questions

### Is the SHERPA UI waterproof?

No. Do not use the SHERPA UI if it is wet. If it gets wet, allow it to dry completely before using it.

### What will happen if I select the wrong voltage?

You can SEVERELY damage your devices if you do not select the right voltage. Please verify the voltage requirements of your device before trying to power it via the SHERPA UI.

### Can I use the SHERPA UI with chained GOAL ZERO SHERPA power packs?

Yes, but make sure all SHERPA power packs are turned on.

### Can I use the SHERPA UI as a stand-alone source of power?

No. The SHERPA UI is specifically designed to enhance the capabilities of the SHERPA power packs. It is NOT a battery, and cannot power items on its own.

### Do I have to have a SHERPA power pack to use my UI?

The SHERPA UI can be used with SHERPA power packs as well as a 12V car adapter (included).

## Compatible With:

Common Western, European, and Asian plugs.  
(Must be 110 or 220V with a maximum of 100 Watts).

GOAL ZERO products:  
SHERPA 50  
SHERPA 120



- Fill out your warranty
- Watch demo video
- Download this manual



### CONTACT US:

Toll Free: 888.794.6250  
14864 Pony Express Road  
Bluffdale, UT, 84065

[WWW.GOALZERO.COM](http://WWW.GOALZERO.COM)

We proudly support Tifie Humanitarian  
[WWW.TIFIE.ORG](http://WWW.TIFIE.ORG)